


Subject: JEDI User's Guide, D41.0.2 (v5)
Authors: Zhang Fan Xing, Haley Nguyen, Cecilia Cheng
Date: March 7, 2012

1. Background

JEDI stands for Java EDR (Experimental Data Record) Display Interface. It is an essential EDR quick-view tool that has made important contributions to many past and current NASA/JPL space missions, such as Cassini, MER and Phoenix. However, being a monolithic java-based web application with tightly-coupled client and server components, it showed a sign of technical aging with increasing difficulty for mission adaptation. To better support future space missions, a task calling for a new design and re-implementation was defined and further funded by the MGSS office.

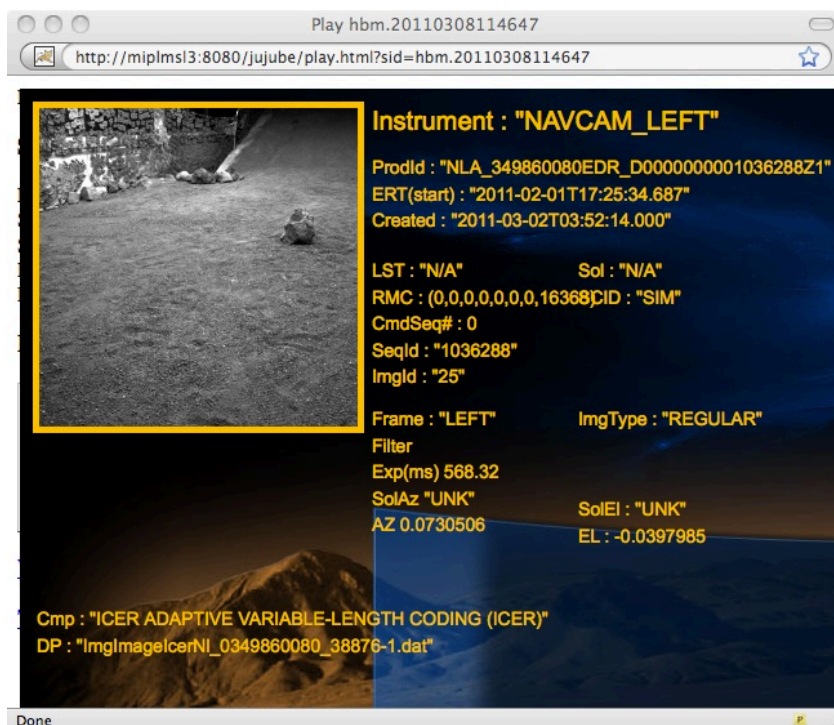

2. Architecture

Listed below are the main features of JEDI:

1. There is a complete separation of presentation from data and logic, which results in independent client and server sides, communicating only through clearly-defined APIs. As such, either side can evolve in its own path, thus is better positioned for easier and much more flexible updates with future web.
2. Some data models in JEDI contain rich science domain knowledge. They have been preserved and improved. Web functionalities are created from scratch leveraging on contemporary web technology.
3. The server side provides individual services covering login/logout, create/display/delete show, etc., all through well-defined APIs. These services can be consumed by the JEDI default client and any new future in-browser or

desktop client.

4. The default JEDI client is an AJAX web client application that mimics JEDI client. It works in all major web browsers out of the box without any library dependency.

3. Server

The server is configured as a web application with a client interface. All images and files must be accessible from the web server installed. Authentication and authorization can be configured. Authentication is done via Kerberos verification. Authorization is done via LDAP verification.

The client interfaces with the server via a web interface to create the view needed by a project.

The JEDI server provides individual RESTful services that clients can interface with to create a complete application for the end user.

3.2 Services

Listed below are service endpoints that are supported in current implementation:

- <http://hostname:port/jujube/login>
- <http://hostname:port/jujube/list>
- <http://hostname:port/jujube/create>
- <http://hostname:port/jujube/modify>
- <http://hostname:port/jujube/delete>
- <http://hostname:port/jujube/logout>
- <http://hostname:port/jujube/streamAppender>
- <http://hostname:port/jujube/play>
- <http://hostname:port/jujube/show>

Most of them are access-controlled by auth credentials.

3.2 Web pages

Pages that are parts of the webapp:

- <http://hostname:port/jujube/login.html>
- <http://hostname:port/jujube/list.html>
- <http://hostname:port/jujube/play.html>

4. Client

The client uses a web interface to create a slideshow of images to be displayed. Each image file (FITS, ISIS, VICAR formats) is displayed together with meta information that is customized with a personality file. The image source can be from a list, a directory, or a stream.

4.1. Authentication and Authorization

Only an authenticated and authorized (A&A) user is permitted. A user must provide valid username and password to login. Authentication is done via Kerberos verification. Authorization is done via LDAP verification. If A&A is not activated, the

user still has to provide a non-empty username and password. A&A can be turned on or off by modifying the tomcat5.conf file and passing the following parameter to tomcat when it starts:

```
-Djujube.auth=[true | false]
```

The LDAP server can be specified in the tomcat5.conf file as well:

```
-Djujube.ldap.url=ldap://miplauth-  
dev.jpl.nasa.gov:389/dc=mipl,dc=jpl,dc=nasa,dc=gov
```

To login, use [hostname:port]/jujube/login.html. The default port is 8080.

Project	Environment	URL
Cassini	Development	http://tpsweb-dev/jujube/login.html
Cassini	Test	http://tpsweb-test/jujube/login.html
Cassini	Operations	https://tpsweb/jujube/login.html

Project	Environment	URL
MSL	MIPL Dev	https://miplmsl3:9443/jujube/login.html
MSL	Dev	http://mslpgsdev1-t.jpl.nasa.gov:8443/jujube/login.html
MSL	Test	http://mslgreencmsa2:8443/jujube/login.html
MSL	Operations	https://????:8080/jujube/login.html

Please contact your project representative to set up authentication and authorization credentials. The installation procedures are documented in Appendix C.


4.2. Create Show

After logging in, the user is presented with a form to create a show.

A show is created using either of two types of data sources:

- a file directory accessible to the server machine that the JEDI application is hosted.
 - Try: /proj/msl/dev/workspace/opgs/matis/ATLO_9/edrgenpipe/output/
 - *VIC
 - /home/hbm/work/MSL/JEDI/MSL_pers1.txt (can be a personality pointer file)
- an in-memory stream data source that can be populated and updated by a tlmproc process via URL push. Requires running the script called JediNewEdr, located in the OPGS tools location (for now, needs to be delivered).
- a list of files

A user can create an arbitrary number of shows, private to the user. Created shows are listed in a table at the top of the page. Each row corresponds to a show that can be played and deleted. If a Show Name is not provided, a show is tagged (and, currently, thus-named) by a combination of user name and creation time. In the current implementation, shows persist only in web server memory and will disappear after a server reboot. It is planned to make them survivable over server reboots.

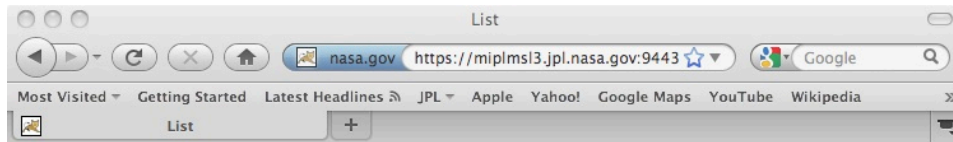

Logged in as cecilia. [Logout](#) | [Help](#)

My Shows

- CSC-ODL [\[browse\]](#) [\[thumbnails\]](#) [\[play\]](#) [\[delete\]](#)
- CSC-stream [\[browse\]](#) [\[thumbnails\]](#) [\[play\]](#) [\[delete\]](#)
- CSC-VIC [\[browse\]](#) [\[thumbnails\]](#) [\[play\]](#) [\[delete\]](#)

Create New Show

1. Select Role
Please pick your role. The roles available are:

2. Select Data Source: [directory](#) or [stream](#)
Enter (a) the source directory name, or (b) the name of the file that lists the full pathnames of the image files.
Source File or Directory:
File filter (eg. *.jpg, N136*IMG):
☐ Process files just once. ☒ Loop through files.

3. Select Personality
There is a default personality file which will be used for each Role and Instrument.
If you prefer to use a different personality file, please provide the URL or file path for it.
☒ Use default personality file
☐ Use other personality file. URL or full file path:

4. Set Show Name (optional)

Create



4.2.1. Select Role

The list of roles for the user is retrieved from the LDAP database. If authentication has been turned off, then there is only 1 role: PROJ. Select the role for your show.

4.2.2. Select Data Source

A show is created using either of two types of data sources:

- A file listing the names of the image files and an optional personality filename, or a directory accessible to the server machine that the JEDI application is hosted.
- An in-memory stream data source that can be populated and updated by the EDR generation pipeline or process via URL push, using a script called JediNewEdr. A stream stays alive (selectable) for 24 hours (default). This parameter can be overridden in the tomcat5.conf:
`-Djujube.stream.idle=8`

4.2.3. Select Personality

The user has two choices for specifying personality:

- Use the default personality that has been defined in the LDAP database for the role. This is only valid when authorization has been enabled.

- Use a specific personality or a personality pointer file.

4.2.4. Set Show Name

A show is identified by a combination of creation time and username. If a name is given when the user creates the show, the show is listed by its name; otherwise, the software will generate a unique identifier for the show.

4.2.5. Pairing an Image File with a Personality File

In this case, there is no show-default personality. Note that the user can specify either show-default personality or personality pointer (See Sections 6 and 7 for how to define these files.)

When the data source is a directory or a stream, if there is a default personality, it will be used; otherwise, a personality will be chosen according to the personality pointer file.

The data files listed in a list can have an optional personality file assigned to it. The image file is listed with this personality file; however, if there is no personality file given, then the default personality file will be used.

4.2.6. List of shows

A user can create an arbitrary number of shows, private to the user. Created shows are listed in a table at the top of the page. Each row corresponds to a show that can be played and deleted. A show is identified by a combination of creation time and username. If a name is given when the user creates the show, the show is listed by its name; otherwise, the software will generate a unique identifier for the show.

In the current implementation, shows persist only in server instance memory and will disappear after a server reboot. It is planned to make them survivable over server reboots.

4.3. Browse Show

To browse a show, click on the "browse" link. A "folder-like" page view of the show will be presented.

On this page, each member entry corresponds to a EDR file, which, in turn, can be clicked on and "opened" like a "folder". This process is traversing till to the end, when there is no more links. On each "folder-like" page, there are also links to meta-info in JSON format, which are helpful to developers who are creating new clients.

Technically, the "folder-like" page view of a show is the simplest html view of a webified "data store", which, in this case, is a show.

4.4. Thumbnails


To display the thumbnails of the show, click on the "thumbnails" link. A window will pop up that shows the thumbnails of all the files that belong to the created show. This window is the same window as the 'Play' window, i.e., if the user clicks on the 'Play' link, then the thumbnails will not be shown. If no image is generated for the

given file, the thumbnail will show up as a question mark. The default number of thumbnails shown is 12. The default thumbnail size is 128x128.

Note: If there are a lot of images in the show, the thumbnails may take a while to load.

4.5. Play Show

To play a show, click on the "play" link. A new browser window will be spawned. In this new window, EDR files contained in the show are displayed one by one in default frequency set up when the show was created.

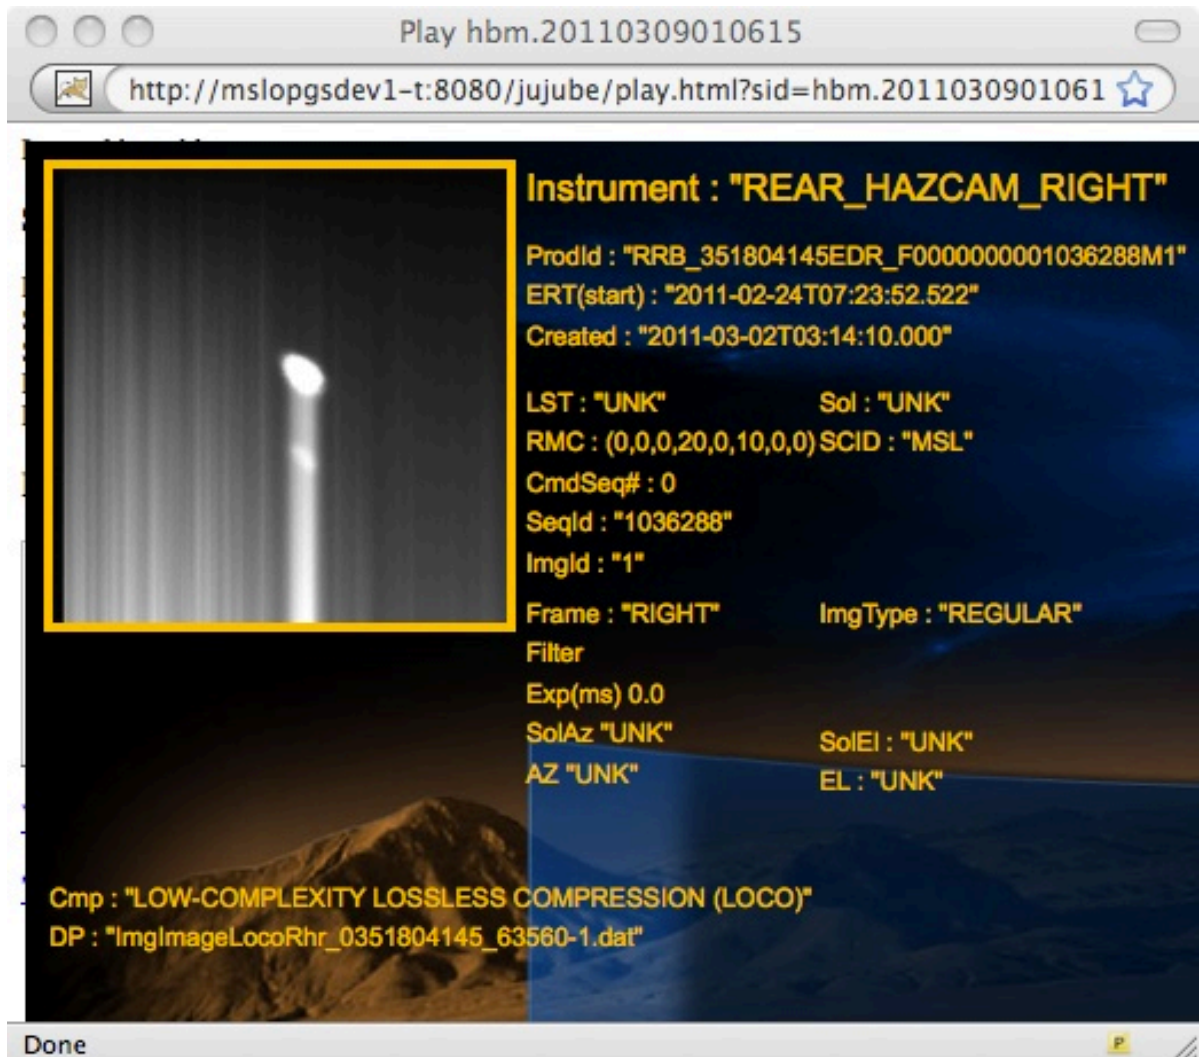

To change the display speed, or tune the show in general, users can simply click anywhere in the window to hide the "slide show". Now in the same window, the form for modifying show behavior will appear, along with show parameters. Try to change some, and click on "Watch The Show", the change will take effect right way.

Play hbm.20110309010615

http://mslogpsdev1-t:8080/jujube/play.html?sid=hbm.20110309010

Logged in as hbm.

Show hbm.20110309010615

Looping: true
Start from current EDR (valid for stream mode only): false
Source: /proj/msl/dev/workspace/opgs/matis/ATLO_9/edrgenpipe/output
Personality name: PROJ
Personality file: /workspace/opgs/config/JEDI/MSL_pers1.txt

Modify Show

Check for new files?	<input type="radio"/> No, don't check <input checked="" type="radio"/> Yes, check every 20 seconds.
Sample Rate:	Show every 1 product. Valid range is 1 to 50.
Update Rate:	Process an EDR every 5 seconds. Valid range is 1 to 60.
SSI Stretch Parameters	Lower limit: 0.005 %, Upper limit: 0.005 %.

[Watch The Show](#)

[Turn debug on](#)

Done

4.6. Delete Show

To delete a show, just click on the "delete" link from the list page.

4.7. Logout

A user logs out by clicking on the "logout" link. In current implementation, a logged-in user will be auto-logged out after a period of inactivity. The default idle time is 10 min (600 sec). When logged out, whether auto or not, created shows will still be alive.

5. Personality and Personality Pointer Files

Personality files are simply ASCII text files that contain component parameters that tell the server how the data will be displayed in the JEDI display window. The file can contain JEDI window component parameters or can be a list of pointers to other personality files to be used when displaying images. The client and server will reference and adhere to this file in presenting the EDR data to the user. The personality file must be viewable by the tomcat server. All parameters are optional except the PersonalityName.

5.1 Notations Used

The lines beginning with '#' are comments.

5.2 Personality Types

There personality file can either be of type PERSONALITY or PERSONALITY-POINTER.

A PERSONALITY type file contains the parameters for formatting the display. The first line of this type of file should be exactly like this:

```
# Content-type: PERSONALITY
```

A PERSONALITY-POINTER file is a file containing references to other PERSONALITY files and controls the number of instances the personality is used. The first line of a personality pointer file should be exactly like this:

```
# Content-type: PERSONALITY-POINTER
```

Personalities are required to have a version number, which can be specified by beginning a line with "# version". Other lines that start with a pound (#) sign is a comment, and will be ignored by the personality parser. On the other hand, personality pointers are not to have a version or comments.

6. Personality Parameters

The following sections list the parameters for a personality file. The mandatory property is PersonalityName. Other ones are optional.

Syntax for the property names and values are as follows:

- Property name is in camel case and case-sensitive.
- Property values take in standard css value if applicable. For possible values, please check any good online css reference such as http://www.w3schools.com/css/css_reference.asp

6.1 Personality Name

Each personality file must have a personality name usually the name of the instrument and will be used to match the role that the user has been assigned to. The name is case insensitive. The default name is PROJ.

```
PersonalityName=PROJ
```

6.2 Display Geometry

The DisplayGeometry allows the user to specify the location and dimensions of the JEDI window.

- **x** and **y** are attributes that tell the server to display the JEDI window at the '**x**'

- row, 'y' column position on the User's Desktop Display.
- **width** and **height** are attributes that tell the server to display the JEDI window of the provided width and height sizes in pixels.

```
DisplayGeometry[x=10, y=100, width=620, height=600]
```

6.3 InstrumentDNScale

InstrumentDNScale specifies how to scale the pixel data number values (DNs) into a 0-256 range.

- The **short** attribute tells JEDI how many bits are used for the DN range from the instrument. This helps in scaling as many cameras of late use 12-bit ranges. Since such values are stored as 16-bit shorts, the short=12 specification helps JEDI know how many bits are actually used to convey the DN from the instrument readings.
- The **byte** attribute is for the same use. Typically, this will always be set to 8. It is included here simply for completeness. Also, if ever there were an instrument that used less than a bytes worth of DN range, this might be helpful.
- You may enter a value of -1 for to **byte** and **short** if the user desires JEDI to perform auto scaling, i.e., let the software figure out the range and scaling.

```
InstrumentDNScale[byte=8, short=12]
```

6.4 IgnoreValues

IgnoreValues specify which pixel data number values (DNs) will be ignored when calculating the mean, max, min values etc. This enhances the quality of the picture by ignoring the saturated points, for example. You may have up to 10 ignored values. Index starts from 1.

```
IgnoreValues[1=4095, 2=255]
```

6.5 Ignore Range

IgnoreRange is for specifying a bigger range of pixel data number values (DNs) to be ignored. Any value \leq the lower value or \geq the upper value will be ignored.

```
IgnoreRange[lower=0, upper=4095]
```

6.6 EDRCanvas

EDRCanvas specifies the information related to the EDR:

- The **name** attribute is the name of the EDR canvas
- The **x**, **y**, **width**, and **height** attributes specify the geometry of the canvas.
- The **stretchType** attribute can be percent or linear, and is the stretch method used.
- The **param0** and **param1** attributes are the lower and upper limits of the stretch.
- The following 5 attributes are optional, but must be specified as a group. If you just specify 1 to 4 parameters, the special check is not performed.

- **minBelowBg** specifies the absolute minimum.
 - **minLowerLimit**
 - **minDifference**
 - **minAbsolute**
 - **maxAbsolute**
- The following 4 attributes are optional, but must be specified as a group. i.e., if you just specify 1 to 3 parameters, the special check is not performed.
 - **missingLineDN** specifies the value that indicates a missing line.
 - **missingLineR**, **missingLineG**, and **missingLineB** are the RGB values for the pixel with with a matching missingLineDN.
- The following 4 attributes are optional, but must be specified as a group, i.e., if you just specify 1 to 3 parameters, the special check is not performed.
- **cropx** specifies the x coordinate of the cropped image
- **crophy** specifies the y coordinate of the cropped image
- **cropwidth** specifies the width of the cropped image
- **cropheight** specifies the height of the cropped image

```
EDRCanvas[name=iss, x=30, y=10, width=256, height=256,
cropx=10, cropy=20, cropwidth=64, cropheight=6, stretchType = percent,
\param0=0.001, param1=0.001, minBelowBg=15.0, minLowerLimit=30.0,
minDifference=50.0, \minAbsolute=0.0, maxAbsolute=4095.0, missingLineDN=0,
missingLineR=255, missingLineG=255, \missingLineB=0]
```

6.7 GreyWedge

GreyWedge is a grey bar that shows the gradation of the DN color scale from 0 to 255.

- The **x**, **y**, **width**, and **height** attributes specify the geometry of the canvas.
- **ascending** steps of gray in the wedge. false means descending.
- **vertical** display of the grey wedge*. * false means a horizontal display.
- **steps** is the number of steps shows in the grey wedge, value is between 1 and 256

```
GreyWedge[name=iss, x=11, y=10, width=16, height=256, ascending=false,
vertical=true, steps=256]
```

6.8 HistogramCanvas

HistogramCanvas specifies the information related to the histogram:

- **name** is the name of the histogram
- **x**, **y**, **width** & **height** specifies the geometry of the canvas.
- **axis** specifies whether the histogram is shown as log or linear.

```
HistogramCanvas[name=iss, x=330, y=480, width=256, height=100, axis=log]
```

6.9 IconCanvas

IconCanvas specifies the information related displaying an icon:

- **x & y** specifies the location of the icon
- **URL** specifies the location of the image used for the icon

```
IconCanvas[x=520,y=10,URL=[https://tpsweb.jpl.nasa.gov/Jedi/images/casslogo_4.gif]
```

6.10 KeywordCanvas

KeywordCanvas specifies the information related to displaying a keyword:

- **x** and **y** specifies the location of the keyword
- **keyword** is the tag used to match the keyword in the EDR label for retrieving the value
- **value** is a place holder to indicate that there's a value associated w/ this keyword
- **show** is the text for the keyword that is displayed
- **delimiter** specifies the symbol used to separate the keyword and its value. A special delimiter '---' is used to indicate that this keyword has no associated value and is treated as a label.
- **color** specifies the color of the text.
- **alarmValue** & **alarmColor** specifies the special alarmed condition
- **alarmOp** is the alarm operation that will be used to determine if the current value is in alarm condition.
 - 0 means no comparison, 1 is for =, 2 is for !=, 3 is for >, 4 is <.
- **evaluatedAsString** is set to false if the comparison is not on numbers; otherwise it's true.
- **fontSize** specifies the font size

```
KeywordCanvas[x=330,y=20,keyword=ANTIBLOOMING_STATE_FLAG,value=---,show=Antiblooming,\delimiter=: ,color=FFFF00,alarmValue=,alarmColor=FF0000,alarmOp=0,evaluatedAsString=true,\fontSize=14]KeywordCanvas[x=330,y=40,keyword=CALIBRATION_LAMP_STATE_FLAG,value=---,show=Cal.Lamp,\delimiter=: ,color=FFFF00,alarmValue=,alarmColor=FF0000,alarmOp=0,evaluatedAsString=true,\fontSize=14]
```

6.11 PointingCanvas

PointingCanvas specifies the information related to the Field Of View (FOV) panels:

- **name** is the name of the object
- **x** and **y** specify the location of the keyword
- **width** and **height** specify the width and height of the object
- **type** is either Elevation or Azimuth
- **deg_keyword** is the tag used to match the keyword in the EDR label for retrieving the value of the viewing angle. Used if **fovFixed** is true.
- **degFov_keyword** is the tag used to match the keyword in the EDR label for retrieving the FOV angle. Used if **fovFixed** is true.
- **clockwise** [true | false] if true, then clockwise is positive; if false, then clockwise is negative
- **fovFixed** [true | false] if true, then the FOV angle is fixed and the FOV value is that of degreesFOV. If false, then the value of **degrees** and **degreesFOV** are ignored.

- **degrees** is the viewing angle. It is ignored if **fovFixed** is false.
- **degreesFOV** is the FOV angle. It is ignored if **fovFixed** is false.

```
PointingCanvas[name=elevation, x=455,y=360, width=101, height=101,
type=Elevation, deg_keyword=INSTRUMENT_ELEVATION,
degFov_keyword=ELEVATION_FOV, clockwise=true, fovFixed=false, degrees=90,
degreesFOV=15]
```

6.12 Additional Property Values

The following table lists the additional values for the given properties:

Property Name	Additional Property Values
DisplayGeometry	backgroundColor, backgroundImage, backgroundRepeat
EDRCanvas	maskBorderThickness, maskBorderColor
IconCanvas	Property URL
KeywordCanvas	a keyword group leader must have property group
KeywordCanvas	a keyword group leader can have properties color, fontSize, fontWeight, fontFamily and align. Please note that align is not a css property and its value can be one of left, right, delimiter. left is the default

7. Personality Pointer Files

The personality pointer files references other personality files. Each line, after the first line, in the file can either be a blank line, or a pair of number and absolute file paths. The show will rotate through the list of given personality files to be applied to the image source.

Personality Pointer Example:

```
# Content-type: PERSONALITY-POINTER
3 /personalities/per_1.txt
2 /personalities/per_2.txt
```

In this example, the first three slides of the show will be displayed using per_1.txt, the next two slides will be displayed using per_2.txt, the next three with per_1.txt, the next two with per_2.txt, and so forth. This rule holds true whether the show is looping or not.

8. Application Features

8.1 Mini Show Meta Info

In the “My Shows” section of the list.html page, users can hover over the show’s “play” or “delete” links to see the show’s creator and its source displayed near the mouse pointer.

8.2 Looping

If the data source is a directory or a list file, the show can display the data again and

again once it has displayed all of the data. This option is not available for stream source.

To activate the option, please choose “Loop through files” when creating the show.

8.3 Start Show with Latest Data

If the data source is a stream, the play of the show always starts with the latest data item in the stream and continues to only display data that comes later.

To activate this option, please choose “Start with current EDR” when creating the show.

8.4 Sample Rate

Sample rate is the time a slide is displayed until it’s replaced by the next slide. Users can change this by clicking on the slide to get to its control panel. The acceptable range is 1-50. However, please note that if you have a slow client and choose a sample rate of 1, the client may not be able to refresh quick enough and may result in missed images.

8.5 Stretch Parameter and Band

Stretch Parameter and Band are display parameters of an EDR. Changing these parameters affect the image display of that EDR. Each slide can contain more than one EDR. For example, Cassini’s ISS slide contains one EDR per slide while Cassini’s VIMS slide contains two EDRs per slide. Consequently, there should be as many Stretch Parameter controls as there are EDRs. In the case of VIMS, this rule also applies to Band controls.

To get to the control, users can click on the slide to get to the control panel.

8.6 Auto Window Resize

By the default, for each slide, the play window will automatically resize to the DisplayGeometry specified in the personality of the slide. To deactivate this feature, users can click on “Turn resize off” in the control panel. To reactivate the feature, users can click on “Turn resize on” in the control panel.

8.7 Debug

To inspect which data file is being displayed and how many slides have been displayed, users can click on “Turn debug on” in the control panel. Once debug is on, the data file’s name and the total number of slides so far is displayed on the top left of the play window.

8.8 Help

For help to use JEDI, users can click on the “Help” link at the top of list.html.

9. Input Update

Input to a show is both the data source and the personalities. This section discusses how the client software handles changes in the show’s input.

9.1 Directory Source Update

When data is added, deleted, or modified in the directory, the changes should be reflected in the show after a twenty-second delay.

9.2 List Source Update

Similarly to a directory source, when EDR-personality pairs are added or deleted in the list, the list is modified entirely, or items are no longer paired with the same personality, or any personality at all, the changes should be correctly reflected after a twenty-second delay.

9.3 Stream Source Update

Unlike directory or list source, stream source only has added data instead of deleted data. However, new data can be added to a stream at random time before the stream expires. As long as the show is running, new data should be displayed as soon as the display rate allows unless there is data that has not yet displayed.

9.4 Personality Update

JEDI currently does not detect personality updates.

9.5 User's Modifications to Show

Users' changes to Stretch Parameter and Band are not persistent to personality file or to the show's internal data. Whenever a show is played, it starts with the same values for Stretch Parameter and Band. Moreover, changes to Stretch Parameter and Band while the show is playing should be reflected as soon as the next slide that uses the same personality.

10. Known Issues

10.1 Thumbnails

1. Thumbnails can take a long time to load.
2. When hovering over the thumbnail, the image is supposed to enlarge. However, this sometimes doesn't work in firefox.
3. The thumbnails pop up in the same window as the play window, so the user can either only see thumbnails or watch the show, but not both

10.2 Persistent Debug Info

Occasionally, it takes two or three tries to turn off debug option in the play window.

10.3 Missing Slides

If the display rate is set higher than 3, i.e. display 1 slide every 3 seconds, sometimes slides will be missed because the server is told to create a new slide while creating the current one.

Appendix A: Example of a Cassini Personality file

```
# Content-type: PERSONALITY
# version 1.1.0
# Each personality file must contain a PersonalityName.
# This is usually the name of the instrument.
# It will be used to match the role that the user has been assigned to.
PersonalityName=CASISS

# DisplayGeometry lets the user specifies the x, y location of the
# JEDI window (applicable for stand-alone version only) and the
# width and height of the window.
DisplayGeometry[x=10, y=100, width=620, height=600]

# InstrumentDNScale specifies how to scale the DN's into a 0-256 range.
# The short specification tells JEDI how many bits are used for the DN range
# from the instrument. This helps in scaling as many cameras of late use
# 12-bit ranges. Since such values are stored as 16-bit shorts, the short=12
# specification helps JEDI knows how many bits are actually used to convey the
# DN from the instrument readings. The byte specification is for the
# same use. Typically, this will always be set to 8. It is included here
# simply for completeness. Also, if ever there were an instrument that used
# less than a byte's worth of DN range, this might be helpful.
# You may enter a -1 for auto scaling, i.e., let the software figure out
# the range and scaling.
InstrumentDNScale[byte=8, short=12]

# IgnoreValues specify which values will be ignored when calculating
# the mean, max, min values etc. This enhanced the quality of the
# picture by ignoring the saturated points, for example. You may
# have up to 10 ignored values. Index starts from 1.
IgnoreValues[1=4095, 2=255]

# IgnoreRange is for specifying a bigger range of values to be
# ignored. Any value <= the lower value or >= the upper value will
# be ignored.
IgnoreRange[lower=0, upper=4095]

# EDRCanvas specifies the information related to the EDR:
#   name is the name of the EDR canvas
#   x, y, width, & height specifies the geometry of the canvas.
#   stretchType can be percent or linear, and is the stretch method used.
#   param0 and param1 are the lower and upper limits for the stretch.
# The following 5 parameters are optional, but must be specified as a group. i.e.,
# if you just specify 1 to 4 parameters, the special check is not performed.
#   minBelowBg specifies the absolute minimum.
#   minLowerLimit
#   minDifference
#   minAbsolute
#   maxAbsolute
# The following 4 parameters are optional, but must be specified as a group. i.e.,
# if you just specify 1 to 3 parameters, the special check is not performed.
#   missingLineDN specifies the value that indicates a missing line.
#   missingLineR, missingLineG, & missingLineB are the RGB values for the pixel w/
#   with a matching missingLineDN.
EDRCanvas[name=iss, x=30, y=10, width=256, height=256, stretchType = percent, \
param0=0.001, param1=0.001, minBelowBg=15.0, minLowerLimit=30.0, \
minDifference=50.0, \
minAbsolute=0.0, maxAbsolute=4095.0, missingLineDN=0, missingLineR=255, \
missingLineG=255, \
missingLineB=0]

# GreyWedge is a grey bar that shows the graduation??
```

```

GreyWedge[name=iss, x=11, y=10, width=16, height=256, ascending=false,
vertical=true, steps=256]

# HistogramCanvas specifies the information related to the histogram:
#   name is the name of the histogram
#   x, y, width & height specifies the geometry of the canvas.
#   axis can be log or linear. It specifies whether the histogram is shown as log or
linear.
HistogramCanvas[name=iss, x=330, y=480, width=256, height=100, axis=log]

# IconCanvas specifies the information related to the icon:
#   x & y specifies the location of the icon
#   URL specifies the location of the image used for the icon
IconCanvas[x=520, y=10, URL=https://tpswweb.jpl.nasa.gov/Jedi/images/casslogo_4.gif]

# KeywordCanvas specifies the information related to a keyword:
#   x & y specifies the location of the keyword
#   keyword is the tag used to match the keyword in the EDR label for retrieving
the value
#   value is a place holder to indicate that there's a value associated w/ this
keyword
#   show is the text for the keyword that is displayed
#   delimiter specifies the symbol used to separate the keyword and its value.
#   color specifies the color of the text
#   alarmValue & alarmColor specifies the special alarmed condition
#   alarmOp is the alarm operation that will be used to determine if the current
value
#   is in alarm condition. 0 means no comparison, 1 is for =, 2 is for !=, 3 is
for >,
#   4 is <.
#   evaluatedAsString is set to false if the comparison is not on numbers;
#   otherwise it's true.
#   fontSize specifies the font size
KeywordCanvas[x=330,y=20,keyword=ANTIBLOOMING_STATE_FLAG,value=---
,show=Antiblooming,\

delimiter=: ,color=FFFF00,alarmValue=,alarmColor=FF0000,alarmOp=0,evaluatedAsString=
true,\
    fontSize=14]
KeywordCanvas[x=330,y=40,keyword=CALIBRATION_LAMP_STATE_FLAG,value=---,show=Cal.
Lamp,\

delimiter=: ,color=FFFF00,alarmValue=,alarmColor=FF0000,alarmOp=0,evaluatedAsString=
true,\
    fontSize=14]

```

Appendix B: Example of a Personality Pointer file

```
# Content-type: PERSONALITY-POINTER
3 /full/path/to/personalities/per_1.txt
2 /full/path/to/personalities/per_2.txt
```

Appendix C: Installation Procedures

1. Create group configuration file :

- Create groups in JPL directory service. E.g. group 'iss_dev' for Cassini's ISS product.
- Create a default personality file for your group.
- Group config file is a text file where each line is a tuple of three space-separated and case-sensitive elements with the first token is the group name, the second token is the name of personality associated with the group, and the third and last element is the full file name of the default personality file for the group. Blank lines are ignored. Here is an example of a line in the group config file:

iss_dev CASISS /Users/honghanh/Documents/workspace/jedi/data/personalities/ISS_labwide_B_1_test.txt
--

2. Get a copy of ehcache.xml:

- A copy of ehcache.xml is available in Appendix D.
- This ehcache.xml is a config file, and you are welcome to write your own using the given one here as an example. For more information on how to write this file, please contact Zhangfan Xing (his contact info is available on JPL Space).
- Save it and take note of the location and reference it in the web.xml file.

3. Unpack WAR file in some temporary directory:

```
% mkdir jujube
% cd jujube
% jar -xf /path/to/jujube.war
```

4. Modify web.xml if using JPL LDAP for Authentication and Authorization

Context-param Name	Value
jujube.authentication.service	<i>jpl.mipl.jujube.auth.LdapAuthentication</i>
jujube.authentication.ldap	<i>ldap://ldap.jpl.nasa.gov:636</i> (this is JPL LDAP server)
jujube.authorization.ldap	<i>ldap://ldap.jpl.nasa.gov:389/ou=personnel,dc=dir,dc=jpl,dc=nasa,dc=gov</i> (this JPL LDAP server)
jujube.authorization.config,	<i>/path/to/config</i>
jujube.auth	<i>true</i>
jujube.admins	The JPL username of whomever in charge of content policies of the JEDI server. The value can be a comma-delimited lists of usernames.
param treevotee.simplelogger.level	<i>none, info, debug, warn, error, fine</i>
jujube.simplecache.enable	<i>yes</i>
jujube.simplecache.ehcache.xml.path	<i>/path/to/ehcache.xml</i>
jujube.ehcache.xml.path	<i>/path/to/ehcache.xml</i>
jujube.stream.idle	set value to the number of hours that your streams are allowed to be idle before it's

	removed from the list of streams. If this value is not set, the default value is 24 hours. A stream is idle when there is no item added to it, and no show is using it.
--	---

5. Repack your WAR file

Inside the jujube directory that we created earlier, please do (your original WAR file will be overwritten): `jar -cf ../jujube.war *`

6. Add WAR file to webapps location

```
% cp jujube.war to /usr/share/tomcat5/webapps/
```

7. Turn on HTTPS:

To turn on encryption, you should add this section after all servlet-mapping sections in web.xml:

```
<security-constraint>
  <web-resource-collection>
    <web-resource-name>Automatic SSL Forwarding</web-resource-name>
    <url-pattern>/*</url-pattern>
  </web-resource-collection>
  <user-data-constraint>
    <transport-guarantee>CONFIDENTIAL</transport-guarantee>
  </user-data-constraint>
</security-constraint>
```

You should also enable HTTP with encryption protocol in Tomcat's server.xml. Your sysadmin should know how to do this. All of your data, including username, password, images and keywords will be encrypted if you do this.

8. Path to Jedi/Jujube:

<http://host:port/jujube/login.html>

Appendix D: Sample ehcache.xml File

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<!--
```

```
CacheManager Configuration
```

```
=====
```

An ehcache.xml corresponds to a single CacheManager.

See instructions below or the ehcache schema (ehcache.xsd) on how to configure.

System property tokens can be specified in this file which are replaced when the configuration

is loaded. For example multicastGroupPort=\${multicastGroupPort} can be replaced with the

System property either from an environment variable or a system property specified with a

command line switch such as -DmulticastGroupPort=4446.

The attributes of <ehcache> are:

- * name - an optional name for the CacheManager. The name is optional and primarily used

for documentation or to distinguish Terracotta clustered cache state. With Terracotta

clustered caches, a combination of CacheManager name and cache name uniquely identify a

particular cache store in the Terracotta clustered memory.

- * updateCheck - an optional boolean flag specifying whether this CacheManager should check

for new versions of Ehcache over the Internet. If not specified, updateCheck="true".

- * monitoring - an optional setting that determines whether the CacheManager should

automatically register the SampledCacheMBean with the system MBean server.

Currently, this monitoring is only useful when using Terracotta clustering and using the

Terracotta Developer Console. With the "autodetect" value, the presence of Terracotta clustering

will be detected and monitoring, via the Developer Console, will be enabled. Other allowed values

are "on" and "off". The default is "autodetect". This setting does not perform any function when

used with JMX monitors.

- * dynamicConfig - an optional setting that can be used to disable dynamic configuration of caches

associated with this CacheManager. By default this is set to true - i.e. dynamic configuration

is enabled. Dynamically configurable caches can have their TTI, TTL and maximum disk and

in-memory capacity changed at runtime through the cache's configuration object.

```
-->
```

```
<ehcache xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:noNamespaceSchemaLocation="ehcache.xsd"
        updateCheck="true" monitoring="autodetect"
        dynamicConfig="true" >
```

```
<!--
```

```
DiskStore configuration
```

```
=====
```

The diskStore element is optional. To turn off disk store path creation, comment out the diskStore element below.

Configure it if you have overflowToDisk or diskPersistent enabled for any cache.

If it is not configured, and a cache is created which requires a disk store, a warning will be issued and java.io.tmpdir will automatically be used.

diskStore has only one attribute - "path". It is the path to the directory where .data and .index files will be created.

If the path is one of the following Java System Property it is replaced by its value in the running VM. For backward compatibility these should be specified without being enclosed in the \${token} replacement syntax.

The following properties are translated:
* user.home - User's home directory
* user.dir - User's current working directory
* java.io.tmpdir - Default temp file path
* ehcache.disk.store.dir - A system property you would normally specify on the command line
e.g. java -Dehcache.disk.store.dir=/u01/myapp/diskdir ...

Subdirectories can be specified below the property e.g. java.io.tmpdir/one

```
-->  
<diskStore path="java.io.tmpdir"/>
```

```
<!--  
TransactionManagerLookup configuration  
=====
```

This class is used by ehcache to lookup the JTA TransactionManager use in the application using an XA enabled ehcache. If no class is specified then DefaultTransactionManagerLookup will find the TransactionManager in the following order

- *GenericJNDI (i.e. jboss, where the property jndiName controls the name of the TransactionManager object to look up)
- *Websphere
- *Bitronix
- *Atomikos

You can provide your own lookup class that implements the net.sf.ehcache.transaction.manager.TransactionManagerLookup interface.

```
-->
```

```
<transactionManagerLookup class="net.sf.ehcache.transaction.manager.DefaultTransactionManagerLookup" properties="" propertySeparator=":"/>
```

```
<!--  
CacheManagerEventListener  
=====
```

Specifies a CacheManagerEventListenerFactory which is notified when Caches are added or removed from the CacheManager.

The attributes of CacheManagerEventListenerFactory are:

- * class - a fully qualified factory class name
- * properties - comma separated properties having meaning only to the factory

Sets the fully qualified class name to be registered as the CacheManager event

nt listener.

The events include:
* adding a Cache
* removing a Cache

Callbacks to listener methods are synchronous and unsynchronized. It is the responsibility of the implementer to safely handle the potential performance and thread safety issues depending on what their listener is doing.

If no class is specified, no listener is created. There is no default.
-->

```
<cacheManagerEventListenerFactory class="" properties=""/>
```

```
<!--  
TerracottaConfig  
=====
```

(Enable for Terracotta clustered operation)

Note: You need to install and run one or more Terracotta servers to use Terracotta clustering.

See <http://www.terracotta.org/web/display/orgsite/Download>.

Specifies a TerracottaConfig which will be used to configure the Terracotta runtime for this CacheManager.

Configuration can be specified in two main ways: by reference to a source of configuration or by use of an embedded Terracotta configuration file.

To specify a reference to a source (or sources) of configuration, use the url attribute. The url attribute must contain a comma-separated list of:

- * path to Terracotta configuration file (usually named tc-config.xml)
- * URL to Terracotta configuration file
- * <server host>:<port> of running Terracotta Server instance

Simplest example for pointing to a Terracotta server on this machine:
<terraccottaConfig url="localhost:9510"/>

Example using a path to Terracotta configuration file:
<terraccottaConfig url="/app/config/tc-config.xml"/>

Example using a URL to a Terracotta configuration file:
<terraccottaConfig url="http://internal/ehcache/app/tc-config.xml"/>

Example using multiple Terracotta server instance URLs (for fault tolerance):
<terraccottaConfig url="host1:9510,host2:9510,host3:9510"/>

To embed a Terracotta configuration file within the ehcache configuration, simply place a normal Terracotta XML config within the <terraccottaConfig> element.

Example:

```
<terraccottaConfig>  
  <tc-config>  
    <servers>  
      <server host="server1" name="s1"/>  
      <server host="server2" name="s2"/>  
    </servers>  
    <clients>  
      <logs>app/logs-%i</logs>  
    </clients>
```

```
</tc-config>
</terracottaConfig>
```

For more information on the Terracotta configuration, see the Terracotta documentation.

```
-->
<terracottaConfig url="localhost:9510"/>
```

```
<!--
Cache configuration
=====
```

The following attributes are required.

name:

Sets the name of the cache. This is used to identify the cache. It must be unique.

maxElementsInMemory:

Sets the maximum number of objects that will be created in memory

maxElementsOnDisk:

Sets the maximum number of objects that will be maintained in the DiskStore. The default value is zero, meaning unlimited.

eternal:

Sets whether elements are eternal. If eternal, timeouts are ignored and the element is never expired.

overflowToDisk:

Sets whether elements can overflow to disk when the memory store has reached the maxInMemory limit.

The following attributes and elements are optional.

overflowToOffHeap:

(boolean) This feature is available only in enterprise versions of Ehcache. When set to true, enables the cache to utilize "off-heap" memory storage to improve performance. Off-heap memory is not subject to Java GC cycles and has a size limit set by the Java property MaxDirectMemorySize. The default value is false.

maxMemoryOffHeap:

(string) This feature is available only in enterprise versions of Ehcache. Sets the amount of off-heap memory available to the cache. This attribute's values are given as <number>k|K|m|M|g|G|t|T for kilobytes (k|K), megabytes (m|M), gigabytes (g|G), or terrabytes (t|T). For example, maxMemoryOffHeap="2g" allots 2 gigabytes to off-heap memory. In effect only if overflowToOffHeap is true.

timeToIdleSeconds:

Sets the time to idle for an element before it expires. i.e. The maximum amount of time between accesses before an element expires. Is only used if the element is not eternal. Optional attribute. A value of 0 means that an Element can idle for infinity.

The default value is 0.

timeToLiveSeconds:

Sets the time to live for an element before it expires. i.e. The maximum time between creation time and when an element expires. Is only used if the element is not eternal. Optional attribute. A value of 0 means that an Element can live for infinity.

Y.

The default value is 0.

diskPersistent:
Whether the disk store persists between restarts of the Virtual Machine. The default value is false.

diskExpiryThreadIntervalSeconds:
The number of seconds between runs of the disk expiry thread. The default value is 120 seconds.

diskSpoolBufferSizeMB:
This is the size to allocate the DiskStore for a spool buffer. Writes are made to this area and then asynchronously written to disk. The default size is 30 MB. Each spool buffer is used only by its cache. If you get OutOfMemory errors consider lowering this value. To improve DiskStore performance consider increasing it.

Trace level
logging in the DiskStore will show if put back ups are occurring.

clearOnFlush:
whether the MemoryStore should be cleared when flush() is called on the cache. By default, this is true i.e. the MemoryStore is cleared.

memoryStoreEvictionPolicy:
Policy would be enforced upon reaching the maxElementsInMemory limit. Default policy is Least Recently Used (specified as LRU). Other policies available - First In First Out (specified as FIFO) and Less Frequently Used (specified as LFU)

Cache elements can also contain sub elements which take the same format of a factory class and properties. Defined sub-elements are:

- * **cacheEventListenerFactory** - Enables registration of listeners for cache events, such as put, remove, update, and expire.
- * **bootstrapCacheLoaderFactory** - Specifies a BootstrapCacheLoader, which is called by a cache on initialisation to prepopulate itself.
- * **cacheExtensionFactory** - Specifies a CacheExtension, a generic mechanism to tie a class which holds a reference to a cache to the cache lifecycle.
- * **cacheExceptionHandlerFactory** - Specifies a CacheExceptionHandler, which is called when cache exceptions occur.
- * **cacheLoaderFactory** - Specifies a CacheLoader, which can be used both asynchronously and synchronously to load objects into a cache. More than one cacheLoaderFactory element can be added, in which case the loaders form a chain which are executed in order. If a loader returns null, the next in chain is called.

Cache Event Listeners

All cacheEventListenerFactory elements can take an optional property listenFor that describes which events will be delivered in a clustered environment. The listenFor attribute

tribute has the
following allowed values:

- * all - the default is to deliver all local and remote events
- * local - deliver only events originating in the current node
- * remote - deliver only events originating in other nodes

Example of setting up a logging listener for local cache events:

```
<cacheEventListenerFactory class="my.company.log.CacheLogger"
    listenFor="local" />
```

Cache Exception Handling +++++

By default, most cache operations will propagate a runtime `CacheException` on failure. An interceptor, using a dynamic proxy, may be configured so that a `CacheExceptionHandler` can be configured to intercept Exceptions. Errors are not intercepted.

It is configured as per the following example:

```
<cacheExceptionHandlerFactory class="com.example.ExampleExceptionHandlerFactory"
    properties="logLevel=FINE"/>
```

Caches with `ExceptionHandler` configured are not of type `Cache`, but are of type `Ehcache` only, and are not available using `CacheManager.getCache()`, but using `CacheManager.getEhcache()`.

Cache Loader +++++

A default `CacheLoader` may be set which loads objects into the cache through asynchronous and synchronous methods on `Cache`. This is different to the bootstrap cache loader, which is used only in distributed caching.

It is configured as per the following example:

```
<cacheLoaderFactory class="com.example.ExampleCacheLoaderFactory"
    properties="type=int,startCounter=10"/>
```

XA Cache +++++

To enable an ehcache as a participant in the JTA Transaction, just have the following attribute

```
transactionalMode="xa", otherwise the default is transactionalMode="off"
```

Cache Writer +++++

A `CacheWriter` maybe be set to write to an underlying resource. Only one `CacheWriter` can be been to a cache.

It is configured as per the following example for write-through:

```
<cacheWriter writeMode="write-through" notifyListenersOnException="true"
```

```
>
    <cacheWriterFactory class="net.sf.ehcache.writer.TestCacheWriterFact
ory"
        properties="type=int,startCounter=10"/>
    </cacheWriter>
```

And it is configured as per the following example for write-behind:

```
    <cacheWriter writeMode="write-behind" minWriteDelay="1" maxWriteDelay="5
"
        rateLimitPerSecond="5" writeCoalescing="true" writeBatching
="true" writeBatchSize="1"
        retryAttempts="2" retryAttemptDelaySeconds="1">
    <cacheWriterFactory class="net.sf.ehcache.writer.TestCacheWriterFact
ory"
        properties="type=int,startCounter=10"/>
    </cacheWriter>
```

The cacheWriter element has the following attributes:

- * writeMode: the write mode, write-through or write-behind

These attributes only apply to write-through mode:

- * notifyListenersOnException: Sets whether to notify listeners when an exception occurs on a writer operation.

These attributes only apply to write-behind mode:

- * minWriteDelay: Set the minimum number of seconds to wait before writing behind. If set to a value greater than 0, it permits operations to build up in the queue. This is different from the maximum write delay in that by waiting a minimum amount of time, work is always being built up. If the minimum write delay is set to zero and the CacheWriter performs its work very quickly, the overhead of processing the write behind queue items becomes very noticeable in a cluster since all the operations might be done for individual items instead of for a collection of them.

- * maxWriteDelay: Set the maximum number of seconds to wait before writing behind. If set to a value greater than 0, it permits operations to build up in the queue to enable effective coalescing and batching optimisations.

- * writeBatching: Sets whether to batch write operations. If set to true, writeAll and deleteAll will be called on the CacheWriter rather than write and delete being called for each key. Resources such as databases can perform more efficiently if updates are batched, thus reducing load.

- * writeBatchSize: Sets the number of operations to include in each batch when writeBatching is enabled. If there are less entries in the write-behind queue than the batch size, the queue length size is used.

- * rateLimitPerSecond: Sets the maximum number of write operations to allow per second when writeBatching is enabled.

- * writeCoalescing: Sets whether to use write coalescing. If set to true and multiple operations on the same key are present in the write-behind queue, only the latest write is done, as the others are redundant.

- * retryAttempts: Sets the number of times the operation is retried in the CacheWriter, this happens after the original operation.

- * retryAttemptDelaySeconds: Sets the number of seconds to wait before retrying an failed operation.

Cache Extension
+++++

CacheExtensions are a general purpose mechanism to allow generic extensions

to a Cache.

CacheExtensions are tied into the Cache lifecycle.

CacheExtensions are created using the CacheExtensionFactory which has a `createCacheCacheExtension()` method which takes as a parameter a Cache and properties. It can thus call back into any public method on Cache, including, of course, the load methods.

Extensions are added as per the following example:

```
<cacheExtensionFactory class="com.example.FileWatchingCacheRefresherExtensionFactory"
                        properties="refreshIntervalMillis=18000, loaderTimeout=3000,
                                flushPeriod=whatever, someOtherProperty=someValue ..."/>
```

Terracotta Clustering
+++++

Cache elements can also contain information about whether the cache can be clustered with Terracotta.

The `<terracotta>` sub-element has the following attributes:

- * `clustered=true|false` - indicates whether this cache should be clustered with Terracotta. By default, if the `<terracotta>` element is included, `clustered=true`.

- * `valueMode=serialization|identity` - indicates whether this cache should be clustered with

- serialized copies of the values or using Terracotta identity mode. By default, values will

- be cached in serialization mode which is similar to other replicated Ehcache modes. The identity

- mode is only available in certain Terracotta deployment scenarios and will maintain actual object

- identity of the keys and values across the cluster. In this case, all users of a value retrieved from

- the cache are using the same clustered value and must provide appropriate locking for any changes

- made to the value (or objects referred to by the value).
- * `synchronousWrites=true|false` - When set to true, clustered caches use Terracotta SYNCHRONOUS WRITE locks. Asynchronous writes (`synchronousWrites="false"`) maximize performance by

- allowing clients to proceed without waiting for a "transaction received" acknowledgement from the server.

- Synchronous writes (`synchronousWrites="true"`) maximize data safety by requiring that a client receive server

- acknowledgement of a transaction before that client can proceed. If coherence mode is disabled using

- configuration (`coherent="false"`) or through the coherence API, only asynchronous writes can occur

- (`synchronousWrites="true"` is ignored). By default this value is false (i.e. clustered caches use normal

- Terracotta WRITE locks).

- * `coherent=true|false` - indicates whether this cache should have coherent reads and writes with guaranteed

- consistency across the cluster. By default, its value is true. If this attribute is set to false

- (or "incoherent" mode), values from the cache are read without locking, possibly yielding stale data.

- Writes to a cache in incoherent mode are batched and applied without acquiring cluster-wide locks,

- possibly creating inconsistent values across cluster. Incoherent mode is a performance optimization

- with weaker concurrency guarantees and should generally be used for bulk-l

loading caches, for loading
 a read-only cache, or where the application that can tolerate reading stale data. This setting overrides
 coherentReads, which is deprecated.
 * copyOnRead=true|false - indicates whether cache values are deserialized on every read or if the
 materialized cache value can be re-used between get() calls. This setting is useful if a cache
 is being shared by callers with disparate classloaders or to prevent local drift if keys/values
 are mutated locally w/o putting back to the cache. NOTE: This setting is only relevant for caches
 with valueMode=serialization

Simplest example to indicate clustering:
 <terraccotta/>

To indicate the cache should not be clustered (or remove the <terraccotta> element altogether):
 <terraccotta clustered="false"/>

To indicate the cache should be clustered using identity mode:
 <terraccotta clustered="true" valueMode="identity"/>

To indicate the cache should be clustered using incoherent mode for bulk load:
 <terraccotta clustered="true" coherent="false"/>

To indicate the cache should be clustered using synchronous-write locking level:
 <terraccotta clustered="true" synchronousWrites="true"/>
 -->

<!--
 Mandatory Default Cache configuration. These settings will be applied to caches created programmatically using CacheManager.add(String cacheName).

The defaultCache has an implicit name "default" which is a reserved cache name.

```
-->
<defaultCache
    maxElementsInMemory="0"
    eternal="false"
    overflowToDisk="true"
    timeToIdleSeconds="1200"
    timeToLiveSeconds="1200">
  <!-- <terraccotta/> -->
</defaultCache>
```

<!--
 Sample caches. Following are some example caches. Remove these before use.
 -->

<!--
 Sample cache named sampleCache1
 This cache contains a maximum in memory of 10000 elements, and will expire an element if it is idle for more than 5 minutes and lives for more than 10 minutes.

If there are more than 10000 elements it will overflow to the disk cache, which in this configuration will go to wherever java.io.tmp is defined on your system. On a standard Linux system this will be /tmp"

```
-->
<cache name="sampleCache1"
    maxElementsInMemory="10000"
```

```

        maxElementsOnDisk="1000"
        eternal="true"
        overflowToDisk="true"
        diskPersistent="true"
        diskSpoolBufferSizeMB="20"
        memoryStoreEvictionPolicy="LFU"
    />
<!--
        timeToIdleSeconds="300"
        timeToLiveSeconds="600"
-->

<!--
    Sample cache named sampleCache2
    This cache has a maximum of 1000 elements in memory. There is no overflow to
    disk, so 1000
    is also the maximum cache size. Note that when a cache is eternal, timeToLiv
    e and
    timeToIdle are not used and do not need to be specified.
-->
<cache name="sampleCache2"
    maxElementsInMemory="10000"
    maxElementsOnDisk="10000"
    eternal="true"
    overflowToDisk="true"
    diskPersistent="true"
    diskSpoolBufferSizeMB="20"
    memoryStoreEvictionPolicy="FIFO"
/>

<!--
    Sample cache named sampleCache3. This cache overflows to disk. The disk stor
    e is
    persistent between cache and VM restarts. The disk expiry thread interval is
    set to 10
    minutes, overriding the default of 2 minutes.
-->
<cache name="sampleCache3"
    maxElementsInMemory="500"
    eternal="false"
    overflowToDisk="true"
    timeToIdleSeconds="300"
    timeToLiveSeconds="600"
    diskPersistent="true"
    diskExpiryThreadIntervalSeconds="1"
    memoryStoreEvictionPolicy="LFU"
/>

<cache name="oneSimpleCache"
    maxElementsInMemory="10000"
    maxElementsOnDisk="1000"
    eternal="true"
    overflowToDisk="true"
    diskPersistent="true"
    diskSpoolBufferSizeMB="20"
    memoryStoreEvictionPolicy="LFU"
/>
</ehcache>

```

Appendix E: SSL Configuration for Tomcat 6.0

SSL Configuration for Tomcat 6.0

This is a simple note based on
<http://tomcat.apache.org/tomcat-6.0-doc/ssl-howto.html>

1. Assumption

We use SSL to encrypt/decrypt communication between client and server.
We don't do Client Authentication.
We only do "self-signed" server Certificate.

More specifically for Tomcat, we use the JSSE implementation of SSL, which is provided as part of the Java runtime (since 1.4).
The other implementation of SSL in Tomcat is APR.

2. Prepare Certificate Keystore

We create a new keystore from scratch, containing a single self-signed Certificate, by

```
$ keytool -genkey -alias tomcat -keyalg RSA -keystore /path/to/my/keystore
```

Caution: make sure use the SAME password for both keystore and Certificate!

3. Edit Tomcat Configuration File

In `./conf/server.xml`, enable `<Connector>...</Connector>` for port 8443 as

```
<Connector port="8443" protocol="HTTP/1.1" SSLEnabled="true"
    maxThreads="150" scheme="https" secure="true"
    keystoreFile="/path/to/my/keystore" keystorePass="myPassword"
    clientAuth="false" sslProtocol="TLS" />
```

4. Force SSL for Individual Tomcat Context

Add the following to its `WEB-INF/web.xml`, after all `<servlet>...</servlet>`:

```
<security-constraint>
  <web-resource-collection>
    <web-resource-name>Automatic SSL Forwarding</web-resource-name>
    <url-pattern>/*</url-pattern>
  </web-resource-collection>
  <user-data-constraint>
    <transport-guarantee>CONFIDENTIAL</transport-guarantee>
  </user-data-constraint>
</security-constraint>
```

5. Test

Restart your Tomcat, and point your browser to

<https://host:8443/jujube/login>

Appendix F: Using the Stream Mode

In the stream mode, the EDR is pushed to the web server via a script that puts together a URL and then sent using wget. If the web server has a self-signed certificate (See Appendix E), then add `--no-check-certificate` to the wget option.

The syntax for the URL is

```
URL="http://${JediHost}/jujube/streamAppender?streamName=${name}&SourceID=${streamId}&EDRName=${3}&mission=${mission}&instrument=${instrument}"
```

Variable	Value	Example
JediHost	The full name of the JEDI webserver. If there's a specific port number, it must be specified.	tpswb-test.jpl.nasa.gov miplmsl3.jpl.nasa.gov:9443
streamName	A string value representing the stream name. If using the provided script, this is created by concatenating the stream name and stream ID that the user provides in the command line	Test_100
EDRname	The full path of the EDR	/home/csc/file.VIC
Mission	A string representing the mission name	cassini MSL
Instrument	A string value that represents the instrument, or NULL. If a string is provided, then it must match the end part of the personality name of one of the user's roles.	CAM ISS

An example of the script is attached below

```
#!/home/jmm/wget.sol-2.7 -q -O /dev/null ${URL}
miplmsl3:/home/csc/jedi/JediNewEdrScripts 146 % more JediNewEdr-MSL
#!/bin/sh

# This script is merely an "impedance matcher" to allow a non-TPS
# (standalone) tlmproc to alert JEDI of new EDR's as they are generated.
# Typically, under the TPS, this would be handled via EdrAvailable events.
# Here, the same information is being transmitted via HTTP using a URL
# API. In the old days his functionality was implemented using dedicated
# Java classes that would serialize the information and send it to a socket
# on the JEDI server. Since this required that the tlmproc shell out to
# invoke this Java class, a new JVM was instantiated _every_ time, resulting
# in quite a bit of performance loss. Now that the JEDI server is a WebApp,
# this is no longer necessary.
#
# For Cassini's tlmproc's, I will be getting the following parameters:
# [JEDI_WEB_HOST] -- if not supplied, $JEDI_WEB_HOST is used, which is set by
select system.
# <STREAM_NAME>
# <STREAM_ID>
# <PRODUCT FILE PATH/NAME>
# <PERSONALITY NAME> -- not send to JEDI but used to figure out instrument.
#
```

```

# These will need to be URL Encoded and shipped to the JEDI WebApp via HTTP.
# An example URL might be:
# http://[JEDI_WEB_HOST]?SourceID=<STREAM_NAME>&EDRName=<PRODUCT FILE
PATH/NAME>&StreamID=<STREAM_ID>&mission=<MISSION NAME>&instrument=<INSTRUMENT NAME>
#
#
# Note: we really don't need <PERSONALITY NAME>. But, we probably do need
# some way to differentiate between URL hosts. So, we could use the fourth
# parameter as a way to relay this. Therefore, WEB_HOST below could be
# configurable at runtime.

LD_LIBRARY_PATH=/usr/local/lib
export LD_LIBRARY_PATH

if [ $# -lt 4 ]; then
    echo "Hey I need [JEDI_WEB_HOST] <STREAM_NAME> <STREAM_ID> <PRODUCT FILE
PATH/NAME> <PERSONALITY NAME> where <PERSONALITY NAME> may
    be either CASISS or CASVIMS only and JEDI_WEB_HOST may optionally specify
    which JEDI server to talk to (e.g., tpsweb-dev.jpl.nasa.gov).
"
    exit -1
fi

if [ $# -gt 4 ]; then
    JediHost=$1
    shift
fi

mission="MSL"
instrument="CAM"
instrument_id="88"

#find the mission
test=`echo $4 | egrep '^CAS'`
if [ "$test" = "$4" ]; then
    mission="cassini"
if [ "$test" = "$4" ]; then
    mission="cassini"
fi

#find the instrument
test=`echo $4 | egrep 'ISS$'`
if [ "$test" = "$4" ]; then
    instrument="ISS"
fi
test=`echo $4 | egrep 'VIMS$'`
if [ "$test" = "$4" ]; then
    instrument="VIMS"
    instrument_id="VIMS"
fi

if [ "$instrument" = "ISS" ]; then
    filename=`basename $3`
    test=`echo $filename | egrep '^N'`
    if [ "$test" = "$filename" ]; then
        instrument="ISS"
        instrument_id="NAC"
    fi
    test=`echo $filename | egrep '^W'`
    if [ "$test" = "$filename" ]; then
        instrument="ISS"
        instrument_id="WAC"
    fi
fi
fi

```



```

if [ -z "${JediHost}" ]; then
    JediHost=${JEDI_WEB_HOST}
fi

if [ -z "${JediHost}" ]; then
    echo "Missing required parameter JEDI_WEB_HOST"
    exit -1
fi

name=`echo ${1} | tr ' ' '+'`
streamId=`echo ${2}_${instrument_id}`
URL="https://${JediHost}/jujube/streamAppender?streamName=${name}&SourceID=${streamId}&EDRName=${3}&mission=${mission}&instrument=${instrument}"

#echo $URL
# csc commented out the echo command on 09/16/2003
# causes the script to just hang if not commented out
# echo "/home/jmm/wget.sol-2.7 -q -O /dev/null ${URL}"

#wget -q -O /dev/null --secure-protocol=auto ${URL}
# This command is for connecting to a self-signed server
wget -q -O /dev/null --secure-protocol=auto --no-check-certificate ${URL}

```